power 2GO

GD-300

Portable Device Power Platform

PLUG AND PLAY

Unlock your new mobile product line with easy assembly!

RAPID DEPLOYMENT

Fully deployed and ready to power up in just 10 seconds.

One-click release or lock of the legs.

Secure the lamp at any height with the buckle.

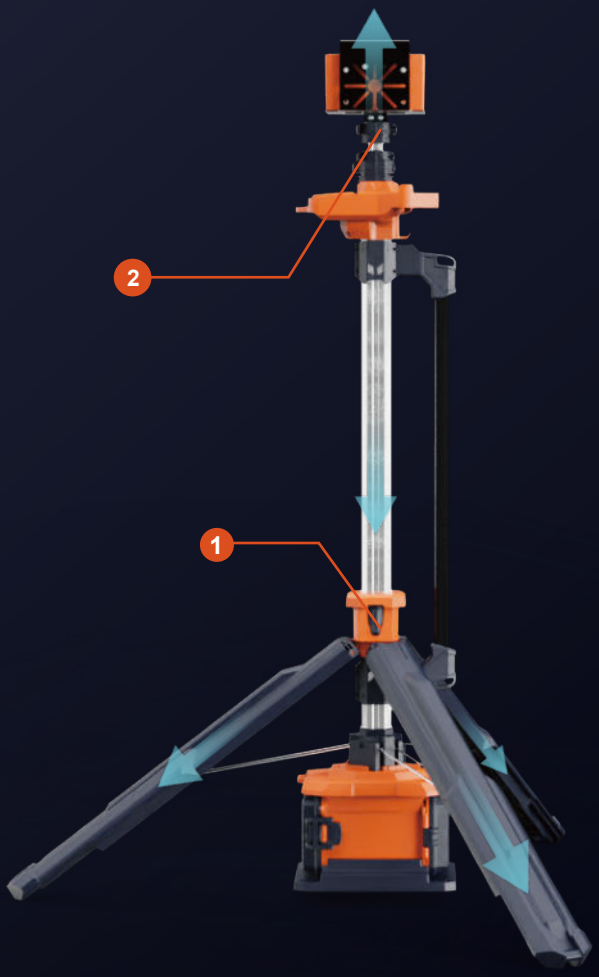

With a low center of gravity and long support legs, it withstands level 8 winds

61.5 to 74.5 km/h.

UNIVERSAL MOUNTING PLATFORM

Multiple mounting holes fit most devices and can be customized.

Left installation

Right installation

Mounted on top

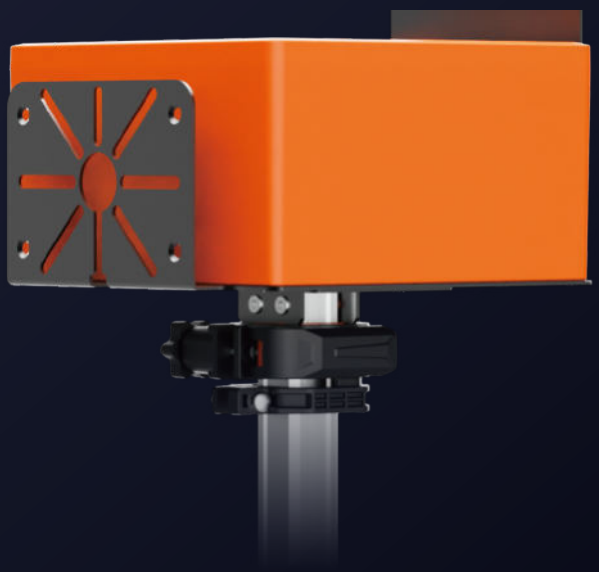

maximum load of **5Kg**

HUMANIZED DESIGN HIDDEN IN THE DETAILS

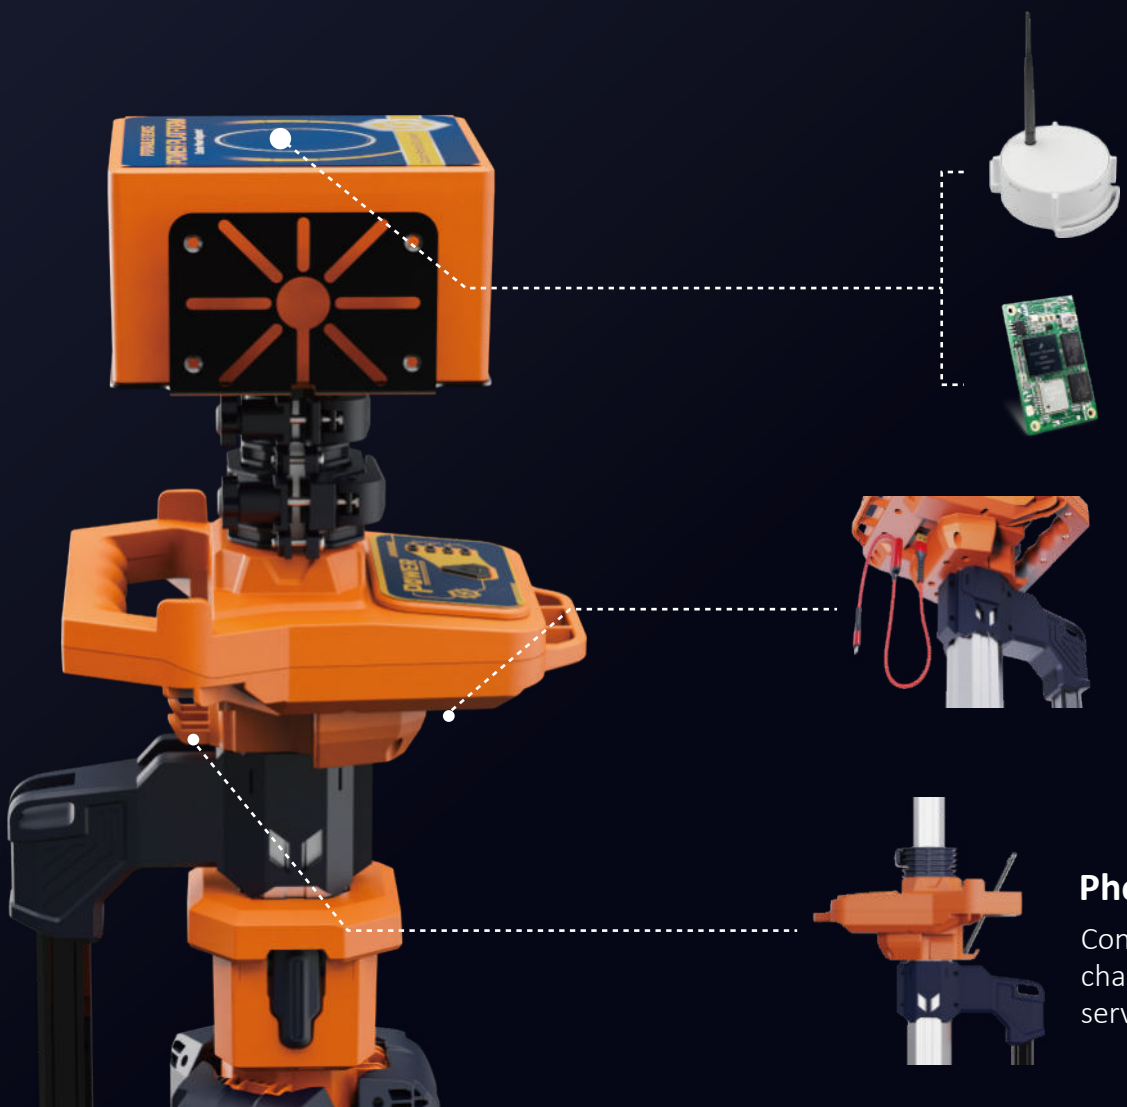

The rainproof box can hold your control and signal devices.

USB Output

Dual rainproof USB outputs for charging two devices at once, rain or shine.

Phone Stand

Continue working while charging, the hook here can serve as a phone stand.

MULTIPLE POWER SUPPLY INTERFACES AVAILABLE

Compatible with most surveillance and electronic devices on the market.

IR INDOOR CAMERA

IR OUTDOOR CAMERA

PTZ CAMERA

Equipped with multiple adapters, ensuring hassle-free use.

ULTRA-LONG WORKING HOURS

Typical working hours
(D24-100 Battery Packs x2)

40-150 Hours

The dual battery pack design allows for hot-swapping without power interruption.

MAXIMUM OUTPUT POWER **40W**

STANDARD KIT

1. GD-300(Portable Device Power Platform) 1pcs
2. MC-2 (Dual Bay Charger) 1pcs
3. D24-100 (Lithium-ion Battery Pack) 2pcs

Designed for single-person operation

Easy to grip and move,
weight **8.4kg** excluding battery pack.

Specifications

GD-300

Height	1.3~3.1m
Weight	8.4KG (Fitting only)
Power Supply	D24 series battery pack
Input	DC-24V
Output Voltage	12V DC
Output Current	≤ 3.4A
Typical working hours	> 40h~150h (D24-100 x 2)
Output(USB)	5V 3A
Operating Temp	-10℃~50℃

Size (mm)

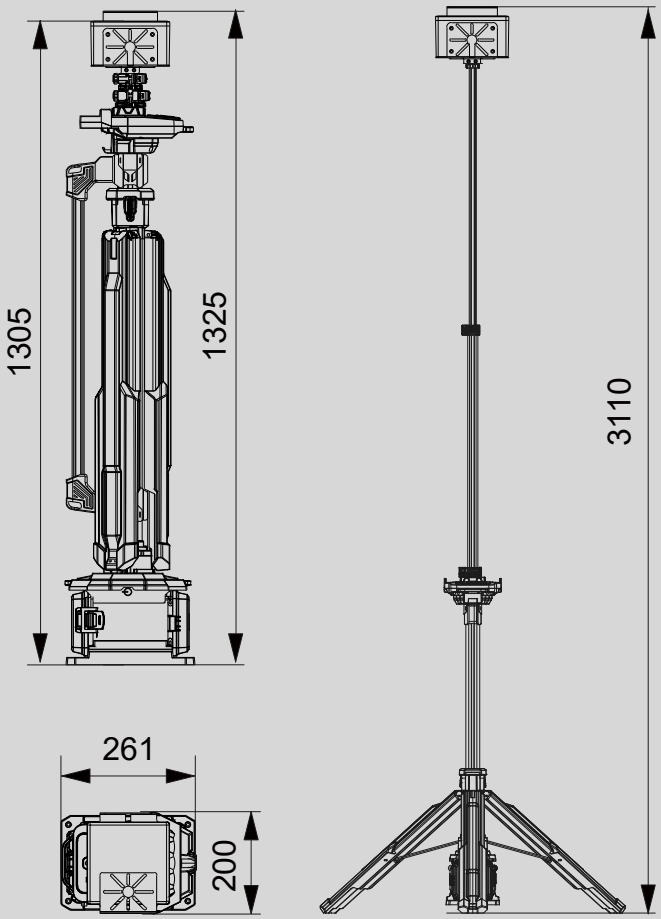

Package

Model	GD-300(1pcs), MC-2(1pcs), D24-100(2pcs)
Size of Carton	1380*260*370mm
Gross Weight of Carton	14.2kg
PCS/Carton	1